

Model 4069LE


SCISSOR LIFTS

Performance

• Working Height	14.19 m
• Platform Height – Elevated	12.19 m
A. Stowed Height	2.80 m
B. Platform Railing Height	1.10 m
C. Stowed Height (Rails Folded)	2.04 m
D. Platform Size (W X L)	1.65 m x 2.92 m
E. Deck Extension	0.91 m
F. Overall Width	1.75 m
G. Overall Length	3.07 m
H. Wheelbase	2.32 m
I. Ground Clearance	0.20 m
• Platform Capacity	360 kg
• Capacity on Deck Extension	120 kg
• Lift/Lower Time	54/50 sec.
• Maximum Drive Height	9.14 m
• Machine weight	5,300 kg
• Maximum Ground Bearing Pressure	4.3 kg/cm ²
• Drive Speed – Lowered	4.8 km/h
• Gradeability	35%
• Turning Radius – Inside	2.29 m
• Turning Radius – Outside	4.88 m



Dimensions

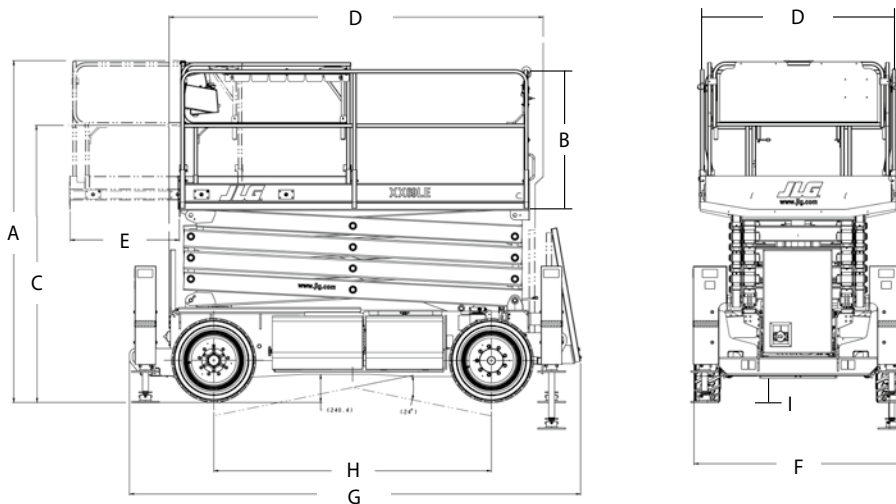

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company