


ROUGH TERRAIN SCISSOR LIFT

SPECIFICATIONS

SJ9241 RT SJ9250 RT

2006/42/CE

| | | |
|--|--------------------|------------------|
| A Work Height | 14,5 m | 17,2 m |
| B Raised Platform Height | 12,5 m | 15,2 m |
| C Lowered Platform Height | 1,7 m | 2,0 m |
| D Overall Width | 2,3 m | 2,3 m |
| E Overall Length | 4,5 m | 4,5 m |
| F Stowed Height (Rails Up) | 2,8 m | 3,2 m |
| G Stowed Height (Rails Down) | 2,0 m | 2,3 m |
| H Platform Width (Inside Dimension) | 1,9 m | 1,9 m |
| Platform Length Stowed (Inside Dimension) | 4,3 m | 4,3 m |
| I Platform Length Extended (Inside Dimension) | 7,2 m | 7,2 m |
| Ground Clearance | 0,2 m | 0,2 m |
| Wheelbase | 3,0 m | 3,0 m |
| Weight | 6715 kg | 7407 kg |
| Gradeability | 30% | 30% |
| Turning Radius (Inside) | 4,4 m | 4,4 m |
| Turning Radius (Outside) | 7,2 m | 7,2 m |
| Lift Time (With Rated Load) | 62 sec | 64 sec |
| Drive Speed (Stowed) | 3,8 km/h | 3,8 km/h |
| Drive Speed (Raised) | 0,72 km/h | 0,72 km/h |
| Maximum Drive Height | Full Height | 7,9 m |
| Capacity (Overall) | 681 kg | 681 kg |
| Maximum # of Persons | 5 | 5 |

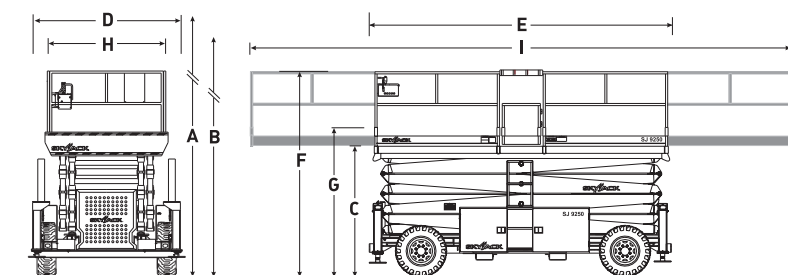

STANDARD FEATURES

- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self centering scissor design
- Dual powered extension decks (1,5 m front and rear)
- Large 7,2 m total working platform length
- Independent/auto leveling outriggers
- Analog control system
- Colour coded and numbered wiring system
- 30% gradeability
- Foam-filled tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

OPTIONS:

- Diesel engine with scrubber
- All motion audible alarm
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

‡ Capacities, and machine weights may differ when options are added

| Model | Capacity With 2 Extension Decks | | |
|---------|---------------------------------|------------|-----------|
| | Main | Front Ext. | Rear Ext. |
| SJ 9241 | 227 kg | 227 kg | 227 kg |
| SJ 9250 | 227 kg | 227 kg | 227 kg |

Skyjack UK

Unit 1, Maes-y-Clawdd
Maesbury Road Industrial Estate
Oswestry, Shropshire, SY10 8NN
Tel: +44 1691 676235
Fax: +44 1691 676239
Email: info@skyjackeurope.co.uk

Skyjack Australia Pty Ltd

4 Coates Place
Wetherill Park
New South Wales, 2164
Tel: +61 (0) 2878 63200
Fax: +61 (0) 2878 63222
Email: jcranmer@skyjack.com

Skyjack France

ZI Le Clairin
69700 Saint Romain en Gier
France
Tel: +33 (0) 4 78 73 53 32
Fax: +33 (0) 4 78 56 52 42

Skyjack Hebebühnen GmbH (Germany)

Wullener Feld 27
D-58454 Witten
Tel: +49 2302 2026909
Fax: +49 2302 2025671

Skyjack AB (Sweden)

Marieholmsgatan 2
415 02 Göteborg
Sweden
Tel: +46 31212245
Fax: +46 31212066

www.skyjack.com



This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC.