

# JCPT(DC)

## Self-Propelled Scissor Lifts (Electric Motor Drive)



### Standard Equipment


- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails



JCPT0607DCS

JCPT0607DCF

	S.W.L	240kg	240kg
	S.W.L On Extension	100kg	100kg
	Max.Occupants	2	2
	<b>A</b> Max.Working Height(CE/ANSI)	5.60m/5.90m	5.60m/5.90m
	<b>B</b> Max.Platform Floor Height(CE/ANSI)	3.60m/3.90m	3.60m/3.90m
	<b>C</b> Overall Length(With Ladder)	1.44m	1.50m
	Overall Length(Without Ladder)	1.29m	1.35m
	<b>D</b> Overall Width	0.76m	0.76m
	<b>E</b> Overall Height(Rails Up)	2.03m	2.03m
	Overall Height(Rails Down)	1.67m	1.67m
	Platform Size(Length/Width <b>F</b> )	1.29×0.70m	1.29×0.70m
	<b>G</b> Platform Extension Size	0.60m	0.60m
	Ground Clearance(Stowed)	0.06m	0.06m
	Ground Clearance(Raised)	0.015m	0.015m
	Wheelbase	1.05m	1.11m
	Turning Radius(Inside/Outside)	0.40m/1.55m	0.3m/1.35m
	Drive Motor	2×24VDC/0.4kW	2×24VDC/0.4kW
	Lifting Motor	24VDC/0.8kW	24VDC/0.8kW
	Travel Speed(Stowed)	4.0km/h	4.0km/h
	Travel Speed(Raised)	0.5km/h	0.5km/h
	Up/Down Speed	32/27sec	32/27sec
	Gradeability	25%	25%
	Max.Working Slope(CE)	1.5°/3°	1.5°/3°
	Max.Working Slope(ANSI)	2°/3°	2°/3°
	Batteries	2×12V/85Ah	2×12V/105Ah
	Integrated Charger	24V/10A	24V/10A
	Tyres	Φ230×80mm	Φ230×80mm
	Weight(CE)	880kg	890kg
	Weight(ANSI)	880kg	890kg

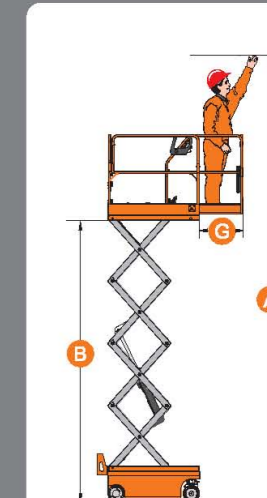

Compact Turning Radius



Pothole Device



Touch Display Screen



Gradeability



Extended Platform



Folding Guardrails



Slide Out Tray



Safety Bracket