


Specifications

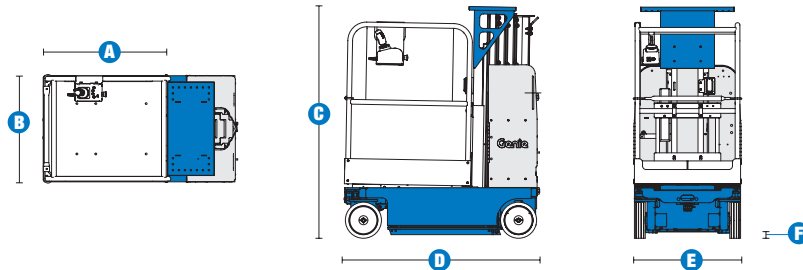

MODELS	GR™-12		GR™-15		GR™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
A B Platform dimensions (l x w)						
Standard	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Stock picker	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m
Stock picker w/adjustable tray	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
Standard AWP	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m
Narrow AWP	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
Standard fiberglass	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m
Narrow fiberglass	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius	zero		zero		zero	
Controls	24 V DC proportional		24 V DC proportional		24 V DC proportional	
Tires	non-marking		non-marking		non-marking	

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L

WEIGHT***						
	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10
----------------------	---

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.
 *** Weight will vary depending on options and/or country standards.