


## **SPECIFICATIONS**

Dimension	Metric	British
Max. Working Height( Indoor)	12.00m	39ft 4in
Max. Platform Height( Indoor)	10.00m	32ft 10in
Max. Working Height(Outdoor)	9.30m	30ft 6in
Max. Platform Height(Outdoor)	7.30m	23ft 11in
Overall Length	2.48m	8ft 2in
Overall Width <b>D</b>	0.83m	2ft 9in
Overall Height(Rails Up)	2.51m	8ft 3in
Overall Height(Rails Down)	2.05m	6ft 9in
Platform Size(Length ×Width )	2.27m×0.81m	7ft 5in×2ft 8in
Platform Extension Size <b>G</b>	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase (1)	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.10m	0in/6ft 11in
Tyres	φ381×127mm	φ381×127mm

250kg	551lb
113kg	249lb
2/1	2/1
25%	25%
5.0km/h	3.10mph
0.8km/h	0.50mph
X-1.5°/Y-3°	X-1.5°/Y-3°
51/42sec	51/42sec
	113kg 2/1 25% 5.0km/h 0.8km/h X-1.5°/Y-3°

Weight			
Overall Weight	3150kg	6944lb	

24V/240Ah	24V/240Ah
24V/30A	24V/30A
2×15VAC/0.87kW	2×15VAC/0.87kW
15VAC/3.5kW	15VAC/3.5kW
	24V/30A 2×15VAC/0.87kW

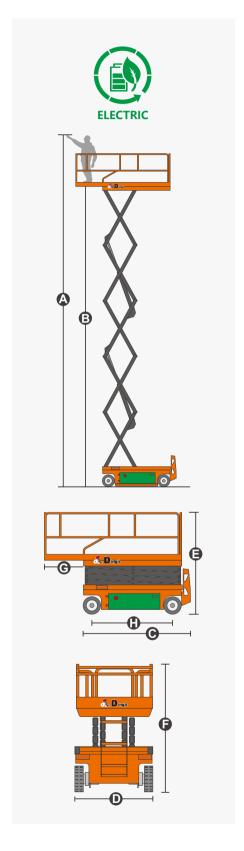





## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- 4×2 Drive
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- · Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











